

■規格:

- 旋轉中心高度:80mm
- 分割24等份、分度15度.±10"
- 三爪主體外徑:85mm、長度:60mm
- 外徑把握: $\phi 2-\phi 70$ mm
- 內徑把握: $\phi 24-\phi 64$ mm
- 平行度:0.002/100mm
- 真圓度:0.002/100mm

■標準配件:


1. 三爪把手 *1支
2. 反爪1組
3. $\phi 18 \times 120$ L 校正棒 *1支

■Specifications:

- Swivel center high: 80mm
- Indexing Div: 24(Every 15°)±10"
- 3-Jaws outer diameter: 85mm、length: 60mm
- Outer clamping gripping diameter: $\phi 2-\phi 70$ mm
- Internal clamping gripping diameter: $\phi 24-\phi 64$ mm
- Parallelism: 0.002/100mm
- Roundness: 0.002/100mm

■Standard Accessories:

1. T-Handle×1pcs
2. Contrary jaw×1set
3. $\phi 18 \times 120$ L PIN ×1pcs

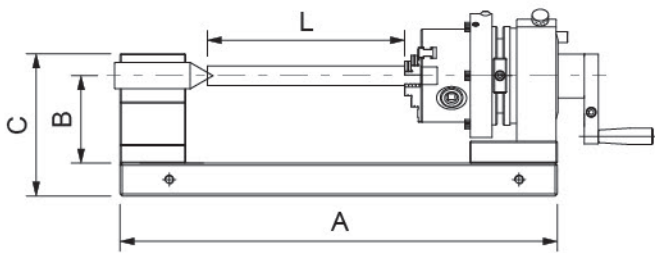

- 三爪研磨器易於挾持工件，拆卸容易，使用方便快速。
- 因三爪夾頭累積公差，挾持不同尺寸工件時會有差異，故設計有水平及同心度調整功能，使用者可自行調整。
- 3-Jaws punch former easy to clamping workpiece, easy to using and disassembly.
- Due to jaw chuck cumulative tolerance, for different size of workpiece the tolerance will different, adjustment design function user can adjust the horizontal and center.

單位:mm

訂購編號 Order No.	型號 Model	A	B	C	L	重量(kg) Weight
31070-30	PFJ300	300	80	130	0~90	19
31070-40	PFJ400	400	80	130	0~190	22
31070-50	PFJ500	500	80	130	0~290	25
31070-60	PFJ600	600	80	130	0~390	28.5