




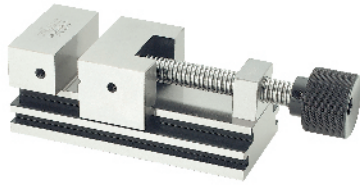

● AS-70

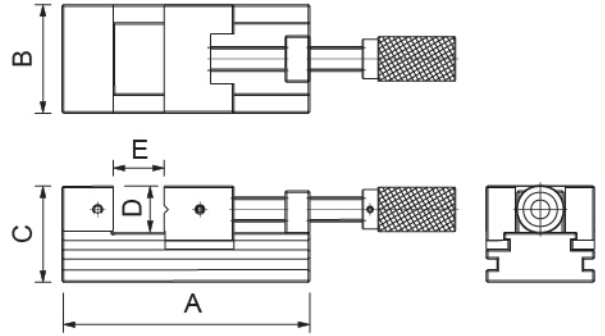

● AS-60



■規格:

- 材質：SKS3
- 硬度：HRC58~60°
- 深冷處理：-185°C
- 平行度：100mm/0.003mm內
- 垂直度：100mm/0.004mm內

■Feature:

- Material：SKS3
- Hardness：HRC58~60°
- Cooling treatment：-185°C
- Parallelism within 0.003mm/100mm
- Squareness within 0.004mm/100mm

● AS型精密工具萬力系列採用高級合金鋼製造，設計結構和精密度都是最好的工具萬力。

● 單向斜角設計，能夠自動校正主體的變形量。
● 由於其品質及精密度穩定，在日本和歐洲國家均受消費者歡迎，並獲得多國大廠長期委託OEM代工製造。

● AS Precision Tool Vise Series made of alloy steel. The structure of design and precision are the best.



● Unidirectional bevel designed to automatically correct the deformation of the body.

● The quality and precision is stable, and it's countries are governed by consumers in Japan and European.

Obtain long-term multi-national manufacturers commissioned OEM contract manufacturing.

單位:mm

訂購編號 Order No.	型號 Model	A	B	C	D	E	重量(kg) Weight
33016-60	AS-60	95	60	50	25	0-32	1.6
33016-70	AS-70	164	70	62	30	0-80	4.3
33016-90	AS-90	215	90	80	40	0-120	8.4

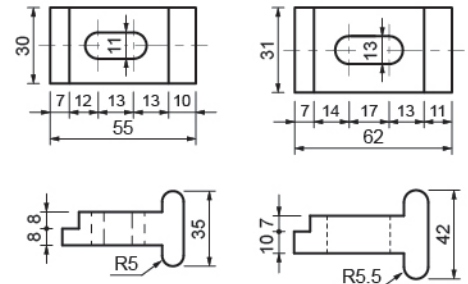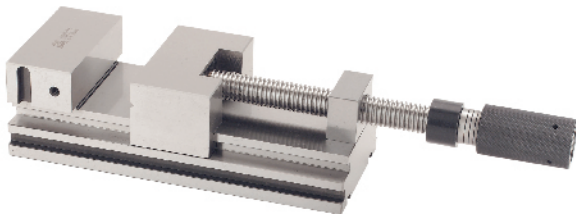

■規格:

- 材質：SNCM21
- 硬度：HRC60° ±2
- 最大夾持力：1500kgf
- 平行度：100mm/0.005mm內
- 垂直度：100mm/0.005mm內

■Feature:

- Material：SNCM21
- Hardness：HRC60° ±2
- Max. clamping forces：1500kgf
- Parallelism within 0.005mm/100mm
- Squareness within 0.005mm/100mm


● 精密油壓工具萬力採用高級合金鋼製造，精密度佳。
● 把手內油壓結構設計，轉動力量輕，就可發揮強大的夾持力。
● 由於其品質及精密度穩定，在日本和歐洲國家均受消費者歡迎，並獲得多國大廠長期委託OEM代工製造。

● Precision Hydraulic Vise manufactured of Alloy steel with good precision.

● The hydraulic structure designed with handle. Turn the light power, there will be strong clamping force.

● The quality and precision is stable, and it's countries are governed by consumers in Japan and European.

Obtain long-term multi-national manufacturers commissioned OEM contract manufacturing.

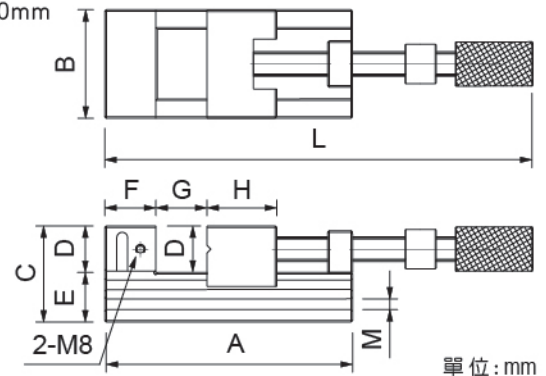

單位:mm

訂購編號 Order No.	型號 Model	A	B	C	D	E	F	G	H	L		M	重量(kg) Weight
										MIN.	MAX.		
33016-93	PGV-100	220	100	80	40	40	40	0-110	50	344	455	9×7	10.0
33016-94	PGV-125	300	125	90	40	50	60	0-165	70	420	590	11×7	19.5